

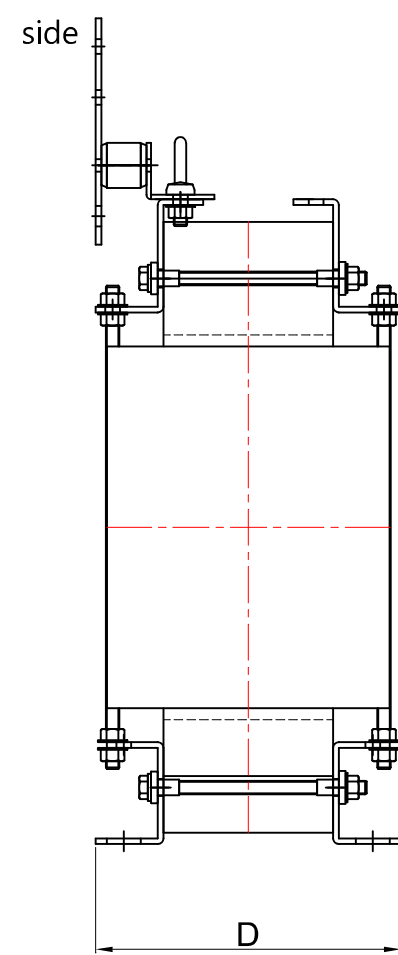


외형 도면

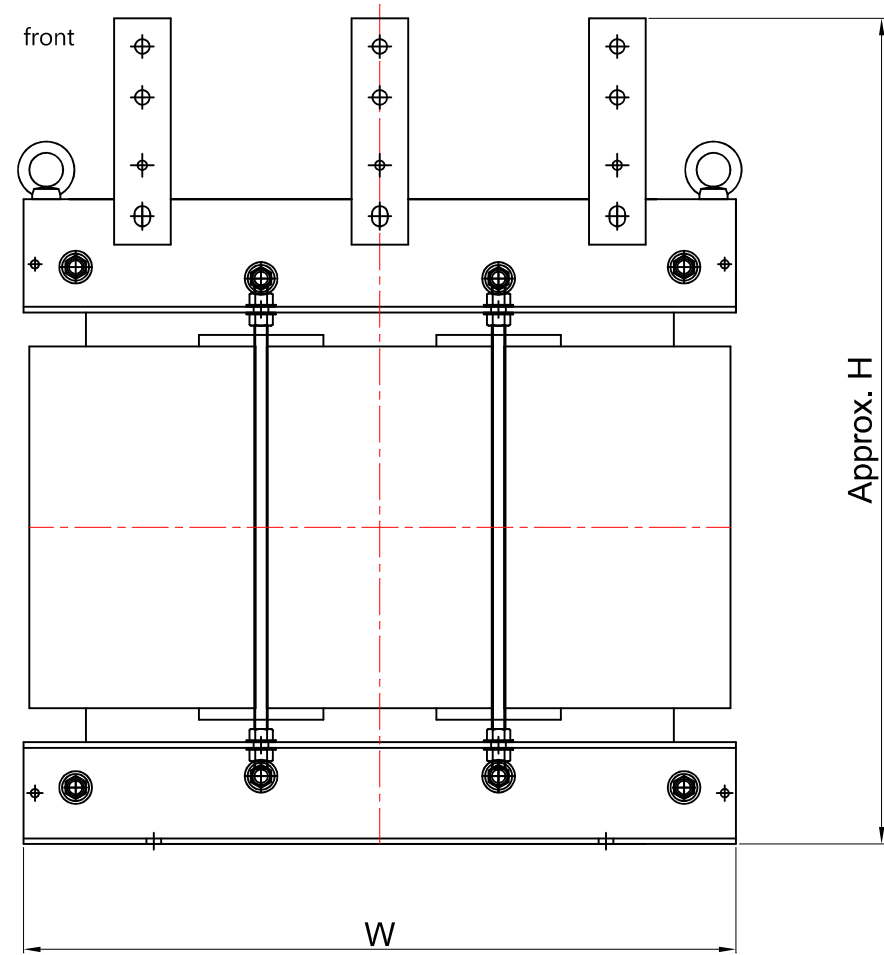

- Technical Specications
- Capacity : 20kVA ~ 100kVA
 - Frequency : 50Hz / 60Hz
 - Primary Voltage : 440V, 380V
 - Secondary Voltage : 220V
 - Insulation : "F" Class
 - Type : Terminal Block
 - Connection : D-y

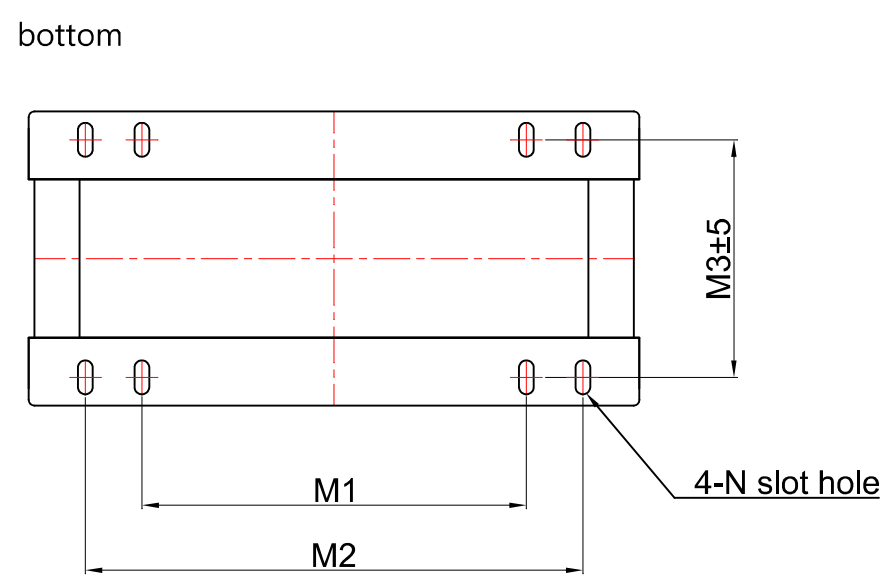

Outline Dimension Table

model	Specifications			Dimmension (mm)							Weight (kg)
	Capa.(kVA)	Pri.(V)	Sec.(V)	W	D	H	M1	M2	M3	N	
S3-A5B 20K	20	380V 440V	220V	435	230	550	215	340	185	10x25	116
S3-A5B 25K	25			435	255	550	215	340	210	10x25	137
S3-A5B 30K	30			435	255	580	215	340	210	10x25	148
S3-A5B 40K	40			495	270	640	340	-	220	13x30	186
S3-A5B 50K	50			540	290	675	340	-	240	13x30	245
S3-A5B 60K	60			600	300	755	400	-	250	13x30	326
S3-A5B 75K	75			600	300	755	400	-	250	13x30	342
S3-A5B 100K	100			720	310	830	500	-	260	13x30	452

** 사양에 따라 외형이 다소 차이가 날수 있으니 참조바랍니다.

S3-A5B [AL, 50hz]

V251219

본 도면은 신승트랜스의 자산이므로 무단 사용을 금합니다.

Rev,no.	Date	Revision description	Disign	Check	Approval



TITLE Outline drawing for 3phase transformer dimension table					Scale	1:1
Date	Designed	Checked	Approved	Sheet no. 1 / 1		A0 Unit mm
2025.12.19			S. K. Kim	Drawing no.	3P TR STD DIM TABLE	