

# SS1-TNDUCD (UL Certified)

## ● Technical Specifications


- Capacity : 5kVA ~ 30kVA
- Operating Frequency : 50Hz/60Hz
- Primary Voltage : AC 200V, 208V, 220V, 230V, 240V
- Secondary Voltage : AC 200V, 208V, 220V, 230V, 240V
- Insulation : "H" Class
- Standard : UL 5085 - 1/2
- UL Approval Number : E533045




## ● Specifications

Model.	Specifications			Dimension(mm)							Weight (kg)
	Capa.(kVA)	Pri.(V)	Sec.(V)	W	D	H	W1	D1	E	MH	
SS1-TNDUCD 005K	5	200V 208V 220V 230V 240V	200V 208V 220V 230V 240V	300	200	306	210	150	M6	Ø11	57
SS1-TNDUCD 007.5K	7.5			300	210	386	210	160	M6	Ø11	80
SS1-TNDUCD 010K	10			330	230	412	230	170	M6	Ø11	93
SS1-TNDUCD 015K	15			340	250	418	230	190	M6	Ø11	112
SS1-TNDUCD 020K	20			350	270	433	230	210	M6	Ø11	137
SS1-TNDUCD 030K	30			370	310	495	260	240	M6	Ø13	200

## ● Dimension

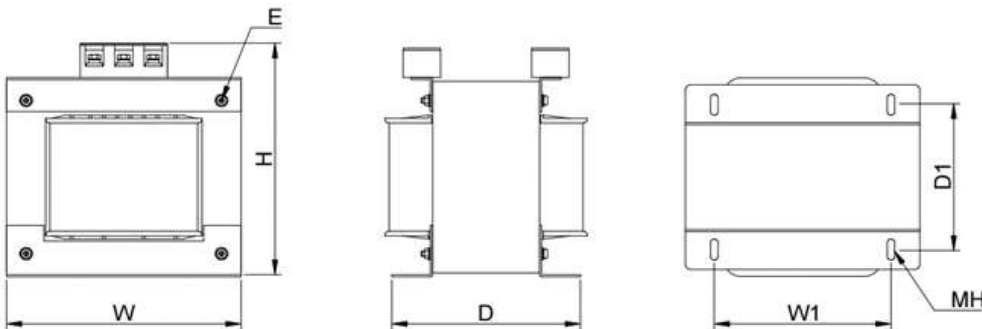

## ● Wiring Diagram

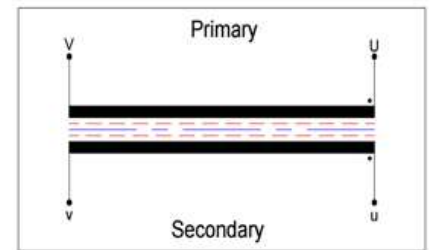

 **SINSUENG TRANS**