

SS3-BNDUCQ (UL Certified)

● Technical Specifications


- Capacity : 120kVA ~ 300kVA
- Operating Frequency : 50Hz/60Hz
- Primary Voltage : AC 380V, 400V, 415V, 440V, 460V, 480V
- Secondary Voltage : AC 208V, 220V, 230V, 240V
- Insulation : "H" Class
- Connection : D-Y
- Standard : UL 5085 - 1/2
- UL Approval Number : E533045



● Specifications

Model.	Specifications			Dimension(mm)							Weight (kg)
	Capa.(kVA)	Pri.(V)	Sec.(V)	W	D	H	W1	D1	E	MH	
SS3-BNDUCQ 120K	120	380V 400V 415V 440V 460V 480V	208V 220V 230V 240V	960	350	830	600	260	M10	Ø13	
SS3-BNDUCQ 150K	150			960	350	830	600	260	M10	Ø13	
SS3-BNDUCQ 180K	180			1020	360	890	600	270	M10	Ø13	
SS3-BNDUCQ 200K	200			1020	360	890	600	270	M10	Ø13	
SS3-BNDUCQ 230K	230			960	360	910	600	270	M10	Ø13	
SS3-BNDUCQ 250K	250			960	360	910	600	270	M10	Ø13	
SS3-BNDUCQ 280K	280			960	360	960	600	270	M10	Ø13	
SS3-BNDUCQ 300K	300			960	360	960	600	270	M10	Ø13	

● Dimension

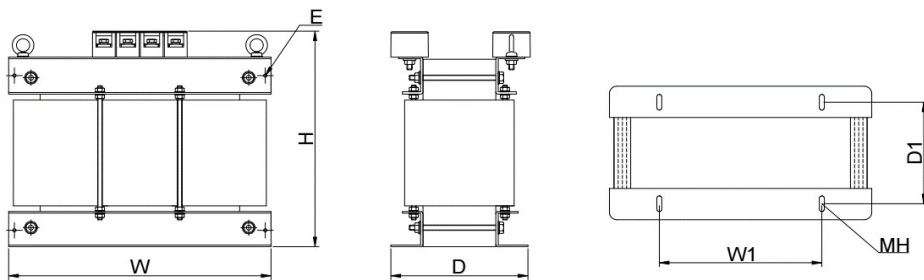

● Wiring Diagram

