

# SS3-TBDUCA (UL Certified)

## ● Technical Specifications


- Capacity : 500VA ~ 3kVA
- Operating Frequency : 50Hz/60Hz
- Primary Voltage : AC 380V, 440V, 460V, 480V
- Secondary Voltage : AC 220V, 230V
- Insulation : "H" Class
- Connection : Y-D
- Standard : UL 5085 - 1/2
- UL Approval Number : E533045




## ● Specifications

Model.	Specifications			Dimension(mm)								Weight (kg)
	Capa.(VA)	Pri.(V)	Sec.(V)	W	D	H	W1	D1	E	MH		
SS3-TBDUCA 500	500	380V 440V 460V 480V	208V 220V	195	145	182	120	110	M6	Ø7	13.7	
SS3-TBDUCA 001K	1K			235	155	220	140	110	M6	Ø7	20	
SS3-TBDUCA 001.5K	1.5K			275	160	249	160	115	M6	Ø10	29	
SS3-TBDUCA 002K	2K			275	170	249	160	125	M6	Ø10	34	
SS3-TBDUCA 003K	3K			330	180	295	200	130	M6	Ø10	49	

## ● Dimension

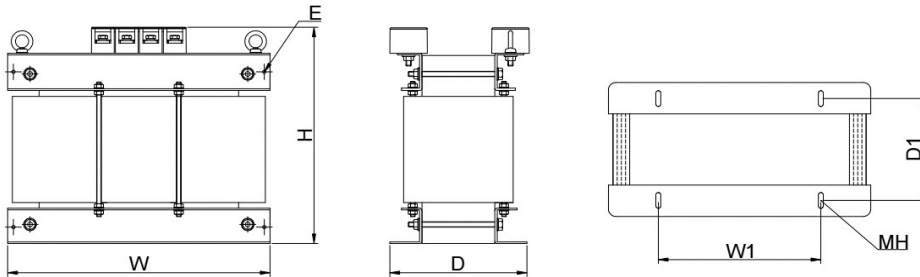

## ● Wiring Diagram

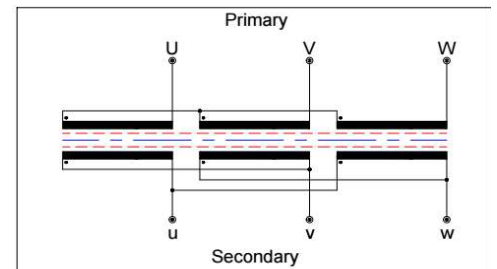

 **SINSUENG TRANS**