

SS3-TNDUCK (UL Certified)

● Technical Specifications


- Capacity : 5kVA ~ 100kVA
- Operating Frequency : 50Hz/60Hz
- Primary Voltage : AC 380V, 400V, 415V, 440V, 460V 480V
- Secondary Voltage : AC 190V, 200V, 208V, 220V, 230V, 240V
- Insulation : "H" Class
- Connection : D-Y
- Standard : UL 5085 - 1/2
- UL Approval Number : E533045



● Specifications

| Model. | Specifications | | | Dimension(mm) | | | | | | | | Weight (kg) |
|-------------------|----------------|--|--|---------------|-----|-----|-----|-----|----|-----|-----|-------------|
| | Capa.(kVA) | Pri.(V) | Sec.(V) | W | D | H | W1 | D1 | E | MH | | |
| SS3-TNDUCK 005K | 5 | 380V 400V 415V 440V 460V 480V | 190V 200V 208V 220V 230V 240V | 405 | 170 | 344 | 300 | 120 | M6 | Ø11 | 57 | |
| SS3-TNDUCK 007.5K | 7.5 | | | 405 | 180 | 364 | 300 | 130 | M6 | Ø11 | 77 | |
| SS3-TNDUCK 010K | 10 | | | 405 | 200 | 384 | 300 | 150 | M6 | Ø11 | 95 | |
| SS3-TNDUCK 015K | 15 | | | 420 | 210 | 429 | 300 | 160 | M6 | Ø11 | 120 | |
| SS3-TNDUCK 020K | 20 | | | 465 | 230 | 449 | 350 | 170 | M6 | Ø11 | 140 | |
| SS3-TNDUCK 030K | 30 | | | 495 | 250 | 454 | 350 | 190 | M8 | Ø13 | 180 | |
| SS3-TNDUCK 040K | 40 | | | 585 | 250 | 469 | 400 | 190 | M8 | Ø13 | 219 | |
| SS3-TNDUCK 050K | 50 | | | 585 | 280 | 515 | 400 | 210 | M8 | Ø13 | 250 | |
| SS3-TNDUCK 060K | 60 | | | 585 | 290 | 580 | 400 | 220 | M8 | Ø13 | 315 | |
| SS3-TNDUCK 075K | 75 | | | 615 | 300 | 595 | 400 | 230 | M8 | Ø13 | 357 | |
| SS3-TNDUCK 085K | 85 | | | 630 | 310 | 625 | 400 | 240 | M8 | Ø13 | 372 | |
| SS3-TNDUCK 100K | 100 | | | 675 | 320 | 665 | 450 | 240 | M8 | Ø13 | 428 | |

● Dimension

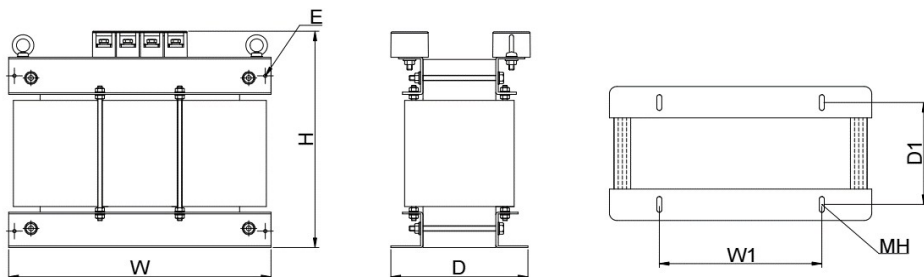

● Wiring Diagram

