

SS3-TNDUCO (UL Certified)

● Technical Specifications


- Capacity : 5kVA ~ 100kVA
- Operating Frequency : 50Hz/60Hz
- Primary Voltage : AC 200V, 208V, 220V, 230V, 240V
- Secondary Voltage : AC 200V, 208V, 220V, 230V, 240V
- Insulation : "H" Class
- Connection : Y-Y
- Standard : UL 5085 - 1/2
- UL Approval Number : E533045



● Specifications

Model.	Specifications			Dimension(mm)								Weight (kg)
	Capa.(kVA)	Pri.(V)	Sec.(V)	W	D	H	W1	D1	E	MH		
SS3-TNDUCO 005K	5	200V 208V 220V 230V 240V	200V 208V 220V 230V 240V	405	170	344	300	120	M6	Ø11	57	
SS3-TNDUCO 007.5K	7.5			405	180	364	300	130	M6	Ø11	77	
SS3-TNDUCO 010K	10			405	200	384	300	150	M6	Ø11	95	
SS3-TNDUCO 015K	15			420	210	429	300	160	M6	Ø11	120	
SS3-TNDUCO 020K	20			465	230	449	350	170	M6	Ø11	140	
SS3-TNDUCO 030K	30			495	250	454	350	190	M8	Ø13	180	
SS3-TNDUCO 040K	40			585	250	469	400	190	M8	Ø13	219	
SS3-TNDUCO 050K	50			585	280	515	400	210	M8	Ø13	250	
SS3-TNDUCO 060K	60			585	290	580	400	220	M8	Ø13	315	
SS3-TNDUCO 075K	75			615	300	595	400	230	M8	Ø13	357	
SS3-TNDUCO 085K	85			630	310	625	400	240	M8	Ø13	372	
SS3-TNDUCO 100K	100			675	320	665	450	240	M8	Ø13	428	

● Dimension

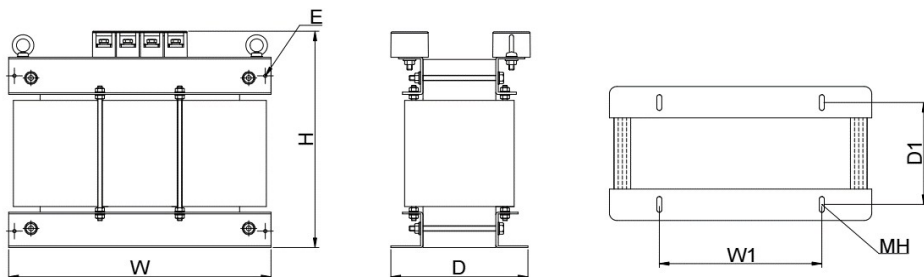

● Wiring Diagram

